

Typ 1189 Low Pressure Bellows Gauge




- 4 ½" dial size
- Bellows-actuated mechanism
- Three bellows materials
- Easy adjustable micrometer pointer
- Aluminum case
- All-stainless steel movement

Ashcroft® bellows gauges are used for measuring low pressures from 10" H₂O to 10 psi pressure as well as vacuum and compound ranges. Coupled with their sensitivity, these gauges have a rugged design for process and industrial applications.

TEMPERATURE LIMITS			
	Ambient	Process	Storage
Dry	-29 / 66 °C	-29 / 66 °C	-40 / 60 °C

Note: Other than discoloration of the dial and hardening of the gasketing that may occur as ambient or process temperatures exceeds 150°F, non-liquid-filled gauges with standard glass windows, can withstand continuous operating temperatures up to 250°F (121°C). Accuracy at temperatures above or below the reference ambient temperature of 68°F (20°C) will be affected by approximately .4% per 25°F. Gauges with soft soldered joints will withstand 250°F (121°C) for short times without rupture, although other parts of the gauge will be destroyed and calibration will be lost. For continuous use and for process or ambient temperatures above 250°F (121°C), a diaphragm seal or capillary or siphon is recommended.

DIMENSIONS

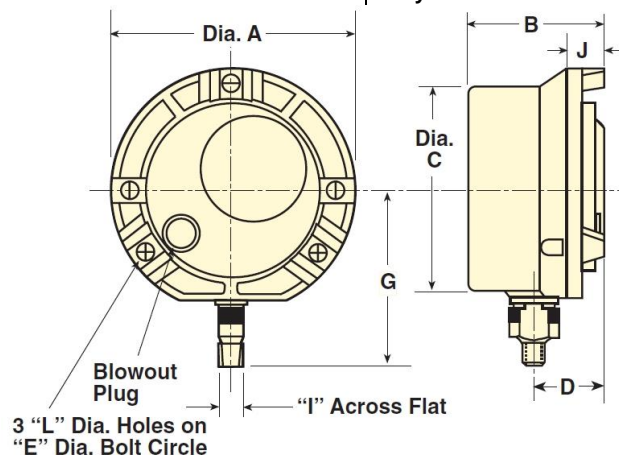

Dial Size	A	B	C	D	E	G	I	J	L	Weight
4 ½"	148	87	124	43	137	38	16	29	5,5	1,1 kg
6"	192	89	162	43	178	38	16	29	7,5	1,4 kg

BELLOW GAUGE PRODUCT CODING:

45 = 1189 =		S =		S =		02 =		B =		0/40MBAR =		X=SG=NH=...	
Dial Size	Type	System (Bellows & Socket)		Case Design	Process Connection Size	Connection Location	Range		Options				
							In.H2O	mbar					
(45) 4 ½"	(1189)	(A)	Phos Brz	(S)	solid front	(02)	¼ NPT male	(B)	0/10	(NH)	SS Wired Tag		
(60) 6"		(S)	AISI			(04)	½ NPT male	(L)	0/15	(TS)	Throttle Screw		
			AISI						0/20	(6B)	Oxygen Service		
			316 SS						0/30	(PD)	Acrylic Window		
		(P)	K Monel						0/40	(SG)	Safety Glass		
			Monel 400						0/60	(EP)	Maximum Pointer, Adjustable		
									0/80	(SH)	Red Set Hand, Stationary		
									0/100	(C4)	Individual Calibration Chart		
									0/150				

Type 1189

Low Pressure Bellows Gauge

STANDARD RANGES										
Double Arc										
Pressure Range		Dial Graduations								
		Inner Scale			Outer Scale		Range	Dial Graduations		
Inner Scale	Outer Scale	Dial Arc	Figure Interval	Minor Grad.	Figure Interval	Minor Grad.	Compound (Vac. / Pressure)	Dial Arc	Figure Interval	Minor Grad.
in. H₂O	Oz/in²						in. H₂O		in. H₂O	
0/10	0/6	180	1	0,5	1	0,25	5/0/5	180	1	0,2
0/15	0/9	180	3	0,5	1	0,25	10/0/10	180	2	0,5
0/20	0/10	180	2	1	1	0,25	30/0/10	270	5	1
0/30	0/18	216	5	1	1	0,5	20/0/20	270	5	0,5
0/40	0/24	270	5	1	3	0,5	40/0/20	270	5	1
0/60	0/35	270	5	1	5	1	10/0/30	270	5	1
0/80	0/45	270	10	1	5	1	30/0/30	270	10	1
0/100	0/57	270	10	1	5	1	70/0/30	270	10	1
0/150	0/90	270	25	1	10	2	20/0/40	270	10	1
psi	in. Hg						50/0/50	270	10	1
0/5	0/10	270	1	0,25	1	0,5	in. Hg/psi	in. Hg psi	in. Hg psi	in. Hg psi
0/8	0/16	270	1	0,25	2	0,5	5/0/3	270	1 1	0,2 ...0,1
0/10	0/20	270	1	0,25	2	0,5	2/0/5	270	1 1	0,1 ...0,1
							5/0/5	270	1 1	0,2 ...0,1
							10/0/5	270	2 1	0,2 ...0,1
Vacuum	in. H₂O	mmHg								
10/0	18/0	180	1	0,5	5	1				
15/0	28/0	180	3	0,5	3	1				
20/0	37/0	180	2	1	5	1				
30/0	56/0	216	5	1	5	1				
40/0	75/0	270	5	1	10	2				
60/0	110/0	270	5	1	10	2				
80/0	150/0	270	10	1	20	5				
100/0	180/0	270	10	1	20	5				
150/0	270/0	270	25	1	20	5				
in. Hg	ft. H₂O									
10/0	11/0	270	1	0,5	1	5				
15/0	17/0	270	1	0,5	2	5				
20/0	23/0	270	2	0,5	2	1				

STANDARD METRIC RANGES										
Dial Arc	Range	Dial Graduations		Range	Dial Graduations		Range	Dial Graduations		Outer Scale
	mm H ₂ O	Figure Interval	Minor Grad.	mbar	Figure Interval	Minor Grad.	kPa	Figure Interval	Minor Grad.	When Dual Range Specified in. H ₂ O
	Pressure:									
180	0/250	50	2	0/25	5	0,2	0/2,5	0,5	0,02	0/10
180	0/400	50	5	0/40	5	0,5	0/4	0,5	0,05	0/16
220	0/600	50	5	0/60	5	0,5	0/6	0,5	0,05	0/24
270	0/1000	100	10	0/100	10	1	0/10	1	0,1	0/40
270	0/1600	200	20	0/160	20	2	0/16	2	0,2	0/60
270	0/2500	500	20	0/250	50	2	0/25	5	0,2	0/100
270	0/4000	500	50	0/400	50	5	0/40	5	0,5	0/160
270	0/6000	500	50	0/600	50	5	0/60	5	0,5	0/240
	Vacuum:									
180	-250/0	50	2	-25/0	5	0,2	-2,5/0	0,5	0,02	10/0
180	-400/0	50	5	-40/0	5	0,5	-4/0	0,5	0,05	16/0
220	-600/0	50	5	-60/0	5	0,5	-6/0	0,5	0,05	24/0
270	-1000/0	100	10	-100/0	10	1	-10/0	1	0,1	40/0
270	-1600/0	200	20	-160/0	20	2	-16/0	2	0,2	60/0
270	-2500/0	500	20	-250/0	50	2	-25/0	5	0,2	100/0
270	-4000/0	500	50	-400/0	50	5	-40/0	5	0,5	160/0
270	-6000/0	500	50	-600/0	50	5	-60/0	5	0,5	240/0
	Compound:									
180	-125/0/125	50	2	-12,5/0/12,5	5	0,2	-1,25/0/1,25	0,5	0,02	5/0/5
180	-200/0/200	50	5	-20/0/20	5	0,5	-2/0/2	0,5	0,05	8/0/8
220	-300/0/300	50	5	-30/0/30	5	0,5	-3/0/3	0,5	0,05	12/0/12
270	-500/0/500	100	10	-50/0/50	10	1	-5/0/5	1	0,1	20/0/20
270	-800/0/800	200	20	-80/0/80	20	2	-8/0/8	2	0,2	30/0/30
270	-1250/0/1250	500	20	-125/0/125	50	2	-12,5/0/12,5	5	0,2	50/0/50
270	-2000/0/2000	500	50	-200/0/200	50	5	-20/0/20	5	0,5	80/0/80
270	-3000/0/3000	500	50	-300/0/300	50	5	-30/0/30	5	0,5	120/0/120