

# All stainless steel process gauge with integrated transmitter

## Model T5500E

Stainless steel transducer incorporating polysilicon thin film technology, output 4 ... 20 mA  
Nominal size 100 mm  
Accuracy of the gauge: Grade 2A (0,5 %)   
Accuracy of electrical output signal: 0,5 % F.S.



### Features

- Rugged stainless steel construction
- Socket and case welded
- Protection IP65
- Usable to full scale
- Overload protection 130 %
- Integrated pressure transmitter


### Ranges

-1 ... 0 bar up to 0 ... 1000 bar  
-30 in. Hg ... 0 psi up to 0 ... 15.000 psi

Technical specification of gauge	T5500E
Construction	Cylindrical case with top vent plug, bayonet ring
Measuring principle	Bourdon tube
Range [bar]	1 1,6 2,5 4 6 10 16 25 40 60 100 160 250 400 600 1000 -1/0 -1/1,5 -1/3 -1/5 -1/9
Overpressure limit	130 % F.S., short time
Pressure type	Gauge, vacuum and compound
Process connection	G ¼ B male, G ½ B male, G 3/8 B male according EN 837, M20x1,5 male, R ½ male tapered (DIN 2999), ½" male straight (JIS, BSP), 3/8" male straight (JIS, BSP) ¼ NPT male, ½ NPT male according ANSI/ASME B1.20.1 9/16-18 UNF-2B Aminco (high pressure), others on request
Connection location	Lower
Material	
Pressure connection	Stainless steel 316L (1.4404)
Tube	Stainless steel 316L (1.4404)
Case and ring	Stainless steel 304 (1.4301), optional 316L (1.4404)
Window	Laminated safety glass, acrylic glass on request
Dial	Aluminum, black markings on white background
Pointer	Aluminum, black, micrometer adjustment, red set hand or maximum pointer on request
Movement	Stainless steel 304/303 (1.4301/1.4305)
Accuracy	Grade 2A (0,5 % F.S.)
Technical specification of transmitter	
Measuring principle	Polysilicon thin film technology
Material sensor	Stainless steel diaphragm 1.4542/1.4548 (17-4 PH)
Power supply	12 ... 30 VDC
Output signal	4 ... 20 mA, 2-wire
Maximum loop resistance	≤ (U <sub>B</sub> - 9,5 V) / 0,02 A
Isolation between case and electrical connection	> 1 MΩ at 50 VDC
Isolation voltage	350 VAC
Supply current	Max. 20 mA
Accuracy according DIN 16 086 (terminal point)	0,5 % F.S.
Repeatability	≤ ±0,03 % F.S.
Response time (10 ... 90 %)	≤ 1 ms
Compensated temperature	-20 ... 70 °C
Temperature effect	±0,3 % / 10 K from 0 ... 50 °C (ref. 20 °C)
CE-mark/EMC	Emission according EN 50 081-1 (March 1993) Immunity according EN 50 082-2 (March 1996)
Electrical connection	Cable connection box universal Typ B on the left site, angle connector according DIN EN 175301-803 on the back or on the left site
General specification	
Permissible	
Ambient temperature	-25 ... 60 °C
Medium temperature	-25 ... 85 °C
Storage temperature	-40 ... 85 °C
Protection according EN 60 529/IEC 529	IP65
Weight [kg]	1,0
Accessories, options	Diaphragm seals, manifolds


General dimensions [mm]

ELECTRICAL CONNECTION: F3 / M2

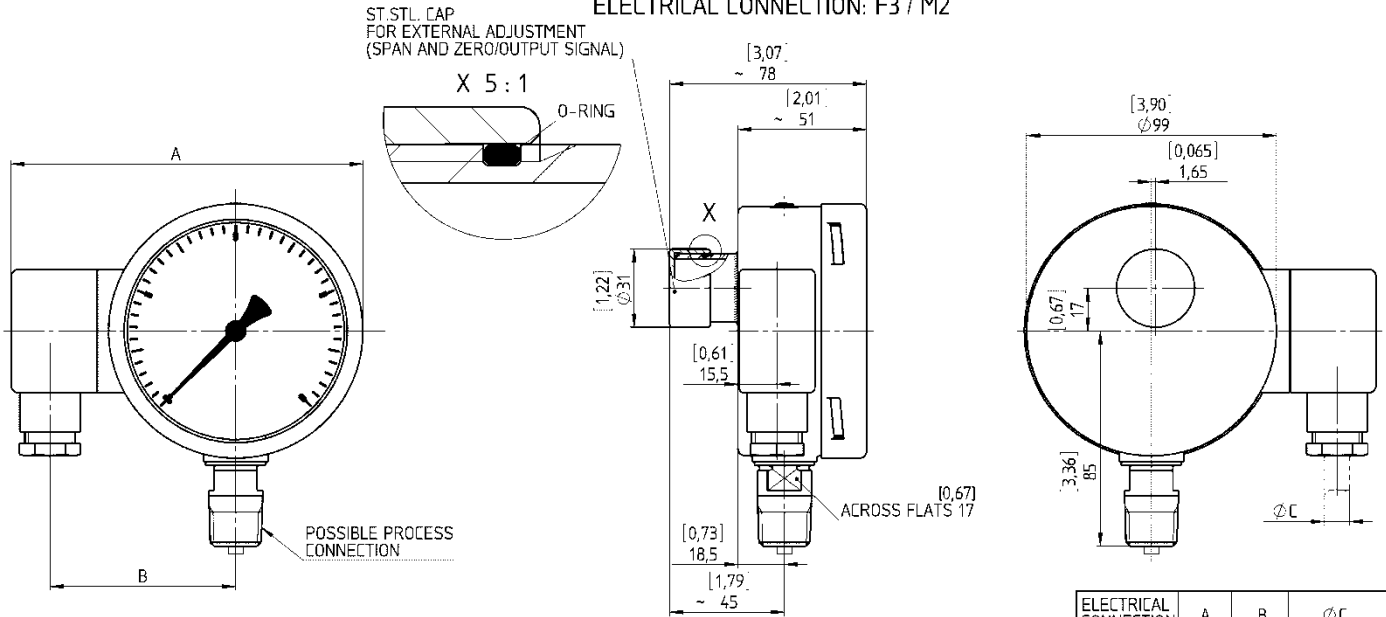


ELECTRICAL CONNECTION	A	B	∅C
F3	[5,47] 139	[2,90] 73,6	[0,28 ... 0,51] ∅7 ... 13
M2	[5,59] 142	[3,17] 80,5	[0,24 ... 0,39] ∅6 ... 10

ELECTRICAL CONNECTION: M1

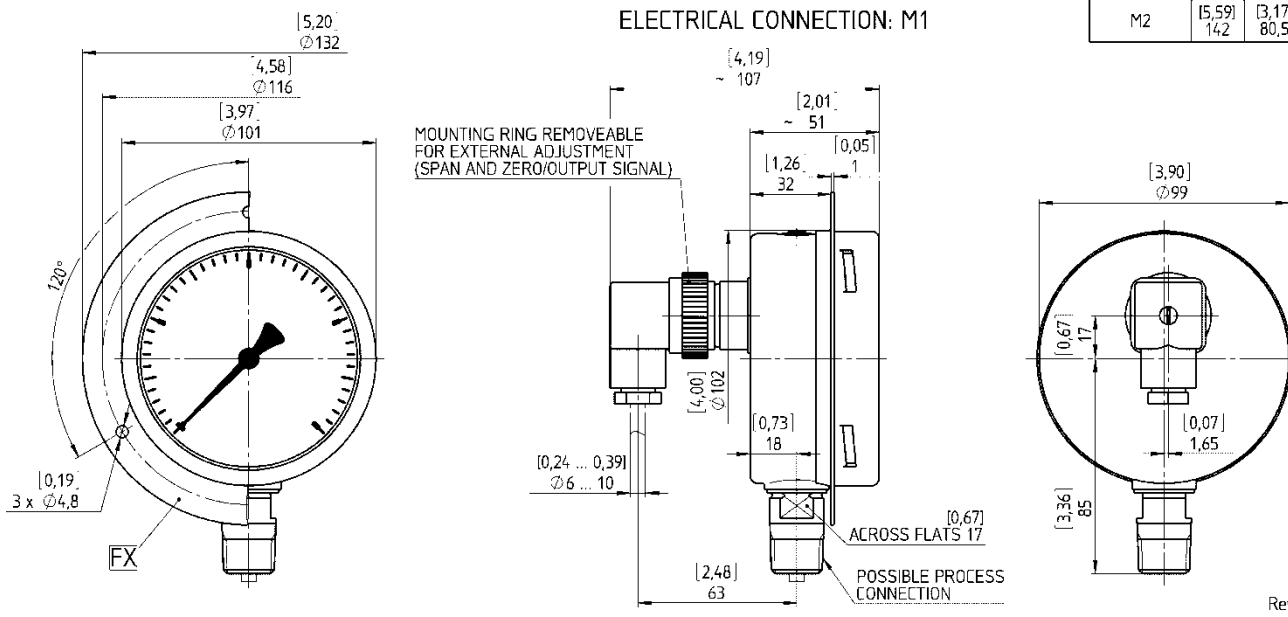

Rev. A

Electrical connection

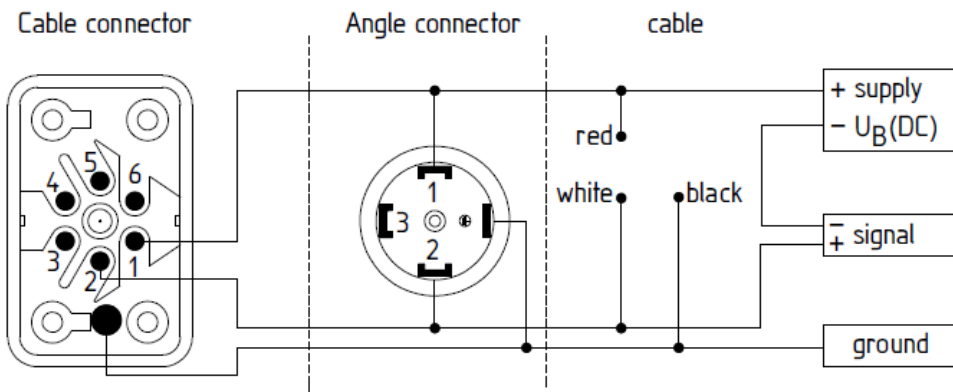

Ashcroft Instruments GmbH

Germany  
Max-Planck-Str. 1,  
D-52499 Baesweiler  
P.O. Box 11 20, D-52490 Baesweiler  
Tel.: +49 (0) 2401 808-0

France  
„206“ ZA du Mandinet, 1/3 Rue des Cam-  
panules,  
F-77185 Lognes  
Tel.: +33 (0) 1 60 37 25 30

Website: [www.ashcroft.eu](http://www.ashcroft.eu)

Ashcroft Instruments Ltd.  
Unit 17 & 18 William James House  
Cowley Road,  
Cambridge CB4 0WX  
Tel.: +44 (0) 12 23 39 55 00

e-Mail: [sales@ashcroft.com](mailto:sales@ashcroft.com)

Ashcroft ISTANBUL  
Gayrettepe Mah. Yildiz Posta Cad.  
Yildiz Residence No:24 K:1 D:4  
34349 Besiktas –Istanbul  
Tel.: +90 (0)212 3270847

## Order information

Size	Execution	Process connection	Connection orientation	Range	Engineering units	Electrical connection	Options		
(100) 100 mm	(SH) IP65, material wetted parts 316 L (1.4404)	(02) ¼ NPT male	(L) Lower	-1/ 0 <sup>1)</sup>	BAR	(F3) Cable connection box universal Typ B on the left site	(YW) Case material 316L (1.4404)		
		(04) ½ NPT male		-1/ 1,5				(NH) Tagging wired	
		(09) 9/16-18 UNF-2B Aminco		-1/ 3				(M1) Angle connector according DIN EN 175301-803 on the back	(TU) Throttle plug
		(13) G ¼ B male		-1/ 5				(M2) Angle connector according DIN EN 175301-803 on the left site	(LL) Liquid less gauge
		(14) G 3/8 B male		-1/ 9					(NZ) Liquid less gauge, silicone free
		(15) G ½ B male		0/ 1					(MP) Micrometer pointer
		(16) M20x1,5 male		0/ 1,6					(OS) Overload stop
		(KN) ½" male straight (JIS, BSP)		0/ 2,5					(VS) Underload stop
		(KP) 3/8" male straight (JIS, BSP)		0/ 4					(EP) Maximum pointer
		(KQ) R½ male tapered DIN 2999		0/ 6					(EQ) Minimum pointer
				0/ 10					(SH) Red set hand stationary
				0/ 16					(PD) Acrylic glass
				0/ 25					(F3X) Front flange
	0/ 40	(C4) 4-points calibration certificate							
	0/ 60								
	0/100								
	0/160								
	0/250								
	0/400								
	0/600								
	0/1000 <sup>2)</sup>								

1) not for option LL and NZ  
2) hysteresis of tube will allow 1 % accuracy only

psi and others on request

## How to order

Size	Type	Execution	Process connection	Connection orientation	Range	Engineering unit	Electrical connection	Case material	Option
100	T5500E	SH	15	L	0/16	BAR	M1	YW	NH

### Ashcroft Instruments GmbH

Germany  
 Max-Planck-Str. 1,  
 D-52499 Baesweiler  
 P.O. Box 11 20, D-52490 Baesweiler  
 Tel.: +49 (0) 2401 808-0

France  
 „206“ ZA du Mandinet, 1/3 Rue des Cam-  
 panules,  
 F-77185 Lognes  
 Tel.: +33 (0) 1 60 37 25 30

Website: [www.ashcroft.eu](http://www.ashcroft.eu)  
 Ashcroft Instruments Ltd.  
 Unit 17 & 18 William James House  
 Cowley Road,  
 Cambridge CB4 0WX  
 Tel.: +44 (0) 12 23 39 55 00

e-Mail: [sales@ashcroft.com](mailto:sales@ashcroft.com)  
 Ashcroft ISTANBUL  
 Gayrettepe Mah. Yildiz Posta Cad.  
 Yildiz Residence No:24 K:1 D:4  
 34349 Besiktas –Istanbul  
 Tel.: +90 (0)212 3270847